
GENERAL DOORS orporation HAMPSHIRE URETHANE INSULATED STEEL RAISED PANEL GARAGE DOOR

The Hampshire Door is 1-3/4" thick, constructed of polyurethane foam injected between two 26-gauge steel skins. This is a super-insulated door with an R-value of 16.0, the highest available. This model is available in short or long panel designs (Colonial or Ranch Style) or in a plain flush front. It is available in five colors: White, Almond, Brown, Sandtone, and Gray. This door is used in colder climates or on any job where insulation is of significant importance.



YOUR DOOR CONFIGURATION: Residential Steel : Hampshire : 2-car : Plain

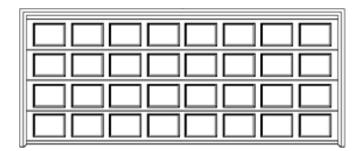


To Find Your Local Dealer Call: (215) 788-9277

Visit: www.general-doors.com Email: sales@general-doors.com

FEATURES:

- I-3/4" thick polyurethane foam injected between two 26 Gauge steel skins separated by a thermal break, yielding an R-value of 16, the highest available.
- Available in a standard Colonial or Ranch (Long Panel) raised panel design. Also available flush.
- Durable two-coat, baked –on polyester finish on top of G-90 hot-dipped galvanized steel, inside and out.
- Full selection of window options, including insulated glass, each frame and insert painted to match door and minimize fading.
- 3/8" deep ship lap joint with dual seal between the sections.
- Limited Lifetime Warranty.

AVAILABLE COLORS:



Refer to samples at your local General dealer for exact color match

Quality Door Solutions Since 1947

1 Monroe Street PO Box 205 Bristol, PA 19007-0205 P: (215) 788-9277 www.general-doors.com